



SERVICE		PRP	ESP *
POWER	kVA	1005	1120
POWER	kW	804	896
RATED SPEED	r.p.m.	1.500	
MAIN VOLTAGE	V	400/230	
AVAILABLE VOLTAGES	V	230/115 230 V (t)	
RATED AT POWER FACTOR	Cos Phi	0,8	

\* ESP power only available on special engine configurations. Consult Gas Commercial Engineering



## INDUSTRIAL RANGE

HIMOINSA Company with quality certification ISO 9001

HIMOINSA gensets are compliant with EC mark which includes the following directives:

- 2006/42/CE Machinery safety.
- 2014/30/UE Electromagnetic compatibility.
- 2014/35/UE electrical equipment designed for use within certain voltage limits
- 2000/14/EC Sound Power level. Noise emissions outdoor equipment. (amended by 2005/88/EC)
- EN 12100, EN 13857, EN 60204

Ambient conditions of reference according to ISO 8528-1:2020 normative: 1000 mbar, 25°C, 30% relative humidity.

Prime Power (PRP):

According to ISO 8528-1:2020, Prime power is the maximum power which a generating set is capable of delivering continuously whilst supplying a variable electrical load when operated for an unlimited number of hours per year under the agreed operating conditions with the maintenance intervals and procedures being carried out as prescribed by the manufacturer. The permissible average power output (Ppp) over 24 h of operation shall not exceed 70 % of the PRP.

Emergency Standby Power (ESP):

According to ISO 8528-1:2020, Emergency standby power is the maximum power available during a variable electrical power sequence, under the stated operating conditions, for which a generating set is capable of delivering in the event of a utility power outage or under test conditions for up to 200 h of operation per year with the maintenance intervals and procedures being carried out as prescribed by the manufacturers. The permissible average power output over 24 h of operation shall not exceed 70 % of the ESP

Continuous Power (COP): According to Standard ISO 8528-1:2020, this is the maximum power available for continuous loads for unlimited running hours a year between the maintenance times recommended by the manufacturer under the environmental conditions established by the same.

\*Class G2\* performance according to the load impact test according to ISO 8528-5:2020

HIMOINSA HEADQUARTERS:

Fábrica: Ctra. Murcia - San Javier, Km. 23,6 | 30730 SAN JAVIER (Murcia) Spain  
Tel.+34 968 19 11 28 Fax +34 968 19 12 17 Fax +34 968 19 04 20 |  
info@himoinsa.com | www.himoinsa.com

Manufacture facilities:

SPAIN • FRANCE • INDIA • CHINA • USA • BRAZIL • ARGENTINA

Subsidiaries:

PORTUGAL | POLAND | GERMANY | UK | SINGAPORE | UAE | PANAMA |  
DOMINICAN REPUBLIC | ARGENTINA | ANGOLA | SOUTH AFRICA | MOROCCO



## OPEN SKID



OPEN SKID



WATER-COOLED



THREE PHASE



50 HZ



NATURAL GAS

Himoinsa has the right to modify any feature without prior notice.

Weights and dimensions based on standard products. Illustrations may include optional equipment.

Technical data described in this catalogue correspond to the available information at the moment of printing.

The illustrations and images are indicative and may not coincide in their entirety with the product.

Industrial design under patent.

\* ESP power only available on special engine configurations. Consult Gas Commercial Engineering



## Engine Specifications | 1.500 r.p.m.

Rated Engine Output (PRP)	kW	842
Rated Engine Output (ESP) *	kW	941
Manufacturer	PSI	
Model	53L	
Engine Type	4-stroke Otto Cycle	
Injection Type	Direct	
Aspiration Type	Turbocharged and after-cooled	
Number of cylinders and arrangement	16-V	
Bore and Stroke	mm	150 x 185
Displacement	L	52,3
Cooling System	Coolant	
Lube Oil Specifications	SAE 15W40; API CD or CE	
Compression Ratio	10,5:1	

Total oil capacity	L	171
Total coolant capacity	L	248
Heat dissipated by coolant	kW	731
Governor	Type	Electrical
Air Filter	Type	Dry

- Natural Gas engine
- 4-stroke cycle
- Water-cooled
- 12V electrical system
- Dry air filter
- Radiator with pusher fan
- HTW sender
- LOP sender
- Electronic governor
- Hot parts protection
- Moving parts protection



## Generator Specifications | MECC ALTE


Manufacturer	MECC ALTE	
Model	ECO43.1M4A	
Poles	No.	4
Connection type (standard)	Star - Parallel	
Mounting type	S-0 18"	
Insulation	H class	

Enclosure (according IEC-34-5)	IP23
Exciter system	Self-excited, brushless
Voltage regulator	A.V.R. (Electronic)
Bracket type	Single bearing
Coupling system	Flexible disc
Coating type	Standard (Vacuum impregnation)

- Self-excited and self-regulated
- 4 poles
- AVR governor
- IP23 protection
- H class insulation
- Single drive-shaft
- Flexible disc coupling

## WEIGHT AND DIMENSIONS

Standard Version		
Length (L)	mm	Ask
Height (H)	mm	Ask
Width (W)	mm	Ask
Weight with liquids in radiator and sump		Ask
Autonomy (70% PRP)	Hours	Ask
Autonomy (100% PRP)	Hours	Ask

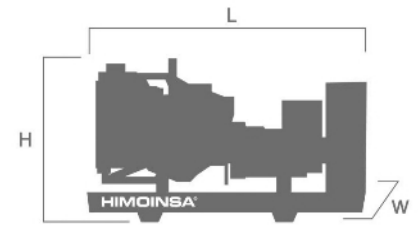

## APPLICATION DATA

### EXHAUST SYSTEM

Maximum exhaust temperature	°C	625
Exhaust Gas Flow	m³/min	150
Maximum allowed back pressure	kPa	13
Heat dissipated by exhaust pipe	kW	786

### NECESSARY AMOUNT OF AIR

Alternator fan air flow	m³/s	1,5
-------------------------	------	-----

### FUEL CONSUMPTION

Fuel Consumption ESP	kw	2688
Fuel Consumption 100% PRP	kw	2442
Fuel Consumption 70 % PRP	kw	1794,8
Fuel Consumption 50 % PRP	kw	1374

### FUEL SYSTEM

Fuel Oil Specifications		Natural Gas
Fuel supply connection size	mm	100
Fuel supply pressure	mbar	100 - 300
Fuel Tank	L	0

### STARTING SYSTEM

Starting power	kW	10 x 2
Starting power	CV	13,6 x 2
Auxiliary Voltage	Vdc	24



## Open set version

- Steel chassis
- Emergency stop button
- Steel industrial silencer -15db(A) attenuation
- Steel residential silencer -35db(A) attenuation.



## Gas ramp

- Manual shut-off valve
- Gas filter
- Double solenoid valve
- Primary pressure regulator
- Secondary pressure regulator (Zero pressure regulator)
- Low pressure switch
- High pressure switch
- Inlet pressure manometer
- Outlet pressure manometer
- Special Start/Stop sequence
- High pressure regulator (Optional).



## Control Panels

### M5

Control panel with CEM8 Auto-Start controller, thermal-magnetic and earth leakage relay (according to voltage and frequency).  
Digital control unit CEM 8

### AS5

Automatic panel WITHOUT transfer switch and WITHOUT mains control with CEM8 unit. (\*) AS5 as optional with CEAB unit. Automatic panel without transfer switch and WITH mains control.  
Digital control unit CEM8 CEAB

---

### AS5 + CC2

Automatic panel WITH transfer switch and with mains control. The display will be on the genset and on the cabinet.  
Digital control unit CEM8+CEC8

### CC2

Himoinsa Switching cabinet WITH display.  
Digital control unit CEC8



## Electrical system

- Electric control and power panel with measurements devices and control unit (according to necessity and configuration)
- Battery Switch
- External power supply is required for remote radiator
- Battery charger (standard on gensets with automatic control panels)
- Heating resistor (standard on sets with automatic control panels)
- Battery charger alternator with ground connection
- Starter battery/ies installed (cables and bracket included)
- Ground connection electrical installation with connection ready for ground spike (not supplied)