



SERVICE		PRP	ESP
POWER	kVA	60	63
POWER	kW	48	50
RATED SPEED	r.p.m.	1.500	
MAIN VOLTAGE	V	400/230	
RATED AT POWER FACTOR	Cos Phi	0,8	



## HS | STATIONARY RANGE

HIMOINSA Company with quality certification ISO 9001

HIMOINSA gensets are compliant with EC mark which includes the following directives:

- 2006/42/CE Machinery safety.
- 2014/30/UE Electromagnetic compatibility.
- 2014/35/UE electrical equipment designed for use within certain voltage limits
- 2000/14/EC Sound Power level. Noise emissions outdoor equipment. (amended by 2005/88/EC)
- EN 12100, EN 13857, EN 60204

Ambient conditions of reference according to ISO 8528-1:2020 normative: 1000 mbar, 25°C, 30% relative humidity.

Prime Power (PRP):

According to ISO 8528-1:2020, Prime power is the maximum power which a generating set is capable of delivering continuously whilst supplying a variable electrical load when operated for an unlimited number of hours per year under the agreed operating conditions with the maintenance intervals and procedures being carried out as prescribed by the manufacturer. The permissible average power output (Ppp) over 24 h of operation shall not exceed 70 % of the PRP.

Emergency Standby Power (ESP):

According to ISO 8528-1:2020, Emergency standby power is the maximum power available during a variable electrical power sequence, under the stated operating conditions, for which a generating set is capable of delivering in the event of a utility power outage or under test conditions for up to 200 h of operation per year with the maintenance intervals and procedures being carried out as prescribed by the manufacturers. The permissible average power output over 24 h of operation shall not exceed 70 % of the ESP

Continuous Power (COP): According to Standard ISO 8528-1:2020, this is the maximum power available for continuous loads for unlimited running hours a year between the maintenance times recommended by the manufacturer under the environmental conditions established by the same.

\*Class G2\* performance according to the load impact test according to ISO 8528-5:2020

HIMOINSA HEADQUARTERS:

Fábrica: Ctra. Murcia - San Javier, Km. 23,6 | 30730 SAN JAVIER (Murcia) Spain  
Tel.+34 968 19 11 28 Fax +34 968 19 12 17 Fax +34 968 19 04 20 |  
info@himoinsa.com | www.himoinsa.com

Manufacture facilities:

SPAIN • FRANCE • INDIA • CHINA • USA • BRAZIL • ARGENTINA

Subsidiaries:

PORTUGAL | POLAND | GERMANY | UK | SINGAPORE | UAE | PANAMA |  
DOMINICAN REPUBLIC | ARGENTINA | ANGOLA | SOUTH AFRICA | MOROCCO



## STANDARD SOUNDPROOFING



HS40



WATER-COOLED



THREE PHASE



50 Hz



DIESEL

Himoinsa has the right to modify any feature without prior notice.

Weights and dimensions based on standard products. Illustrations may include optional equipment.

Technical data described in this catalogue correspond to the available information at the moment of printing.

The illustrations and images are indicative and may not coincide in their entirety with the product.

Industrial design under patent.



## Engine Specifications | 1.500 r.p.m.

Rated Engine Output (PRP)	kW	57
Rated Engine Output (ESP)	kW	66
Manufacturer	FPT_IVECO	
Model	R38MSNS01.66A0 1	
Engine Type	4-stroke diesel	
Injection Type	Direct	
Aspiration Type	Turbocharged	
Number of cylinders and arrangement	4-L	
Bore and Stroke	mm	102 x 115
Displacement	L	3,76
Cooling System	Liquid (water + 50% glycol)	
Lube Oil Specifications	ACEA E3 - E5	
Compression Ratio	17,5:1	

Lube oil consumption with full load	g/kWh	0,2
Total oil capacity	L	8
Total coolant capacity	L	16,6
Governor	Type	Mechanical
Air Filter	Type	Dry



## Generator Specifications | HIMOINSA


Manufacturer	HIMOINSA	
Model	HA24E	
Poles	No.	4
Connection type (standard)	Star-series	
Mounting type	S-3 11*1/2	
Insulation	H class	

Enclosure (according IEC-34-5)	IP23
Exciter system	Self-excited, brushless
Voltage regulator	A.V.R. (Electronic)
Bracket type	Single bearing
Coupling system	Flexible disc
Coating type	Standard (Vacuum impregnation)

## WEIGHT AND DIMENSIONS

Standard Version		
Length (L)	mm	2600
Height (H)	mm	1500
Width (W)	mm	910
Maximum shipping volume	m <sup>3</sup>	3,55
Weight with liquids in radiator and sump		Ask
Fuel tank capacity	L	195
Autonomy (70% PRP)	Hours	20
Autonomy (100% PRP)	Hours	15

Steel tank

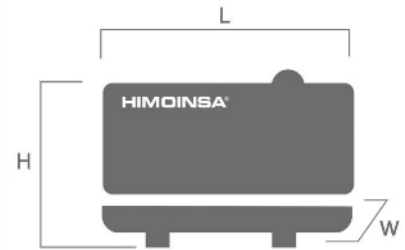

## APPLICATION DATA

### EXHAUST SYSTEM

Maximum exhaust temperature	°C	600
Exhaust Gas Flow	kg/s	0,16
Maximum allowed back pressure	kPa	10

### NECESSARY AMOUNT OF AIR

Intake air flow	m <sup>3</sup> /h	456,8
Cooling Air Flow	m <sup>3</sup> /s	2,6
Alternator fan air flow	m <sup>3</sup> /s	0,216

### FUEL CONSUMPTION

Fuel Consumption ESP	kg/h	15,1
Fuel Consumption 100% PRP	kg/h	13,2
Fuel Consumption 70 % PRP	kg/h	9,83
Fuel Consumption 50 % PRP	kg/h	7,1

### FUEL SYSTEM

Fuel Oil Specifications		Diesel
Fuel Tank	L	195

### STARTING SYSTEM

Starting power	kW	3,5
Starting power	CV	4,76
Recommended battery	Ah	85
Auxiliary Voltage	Vdc	12



## Control Panels



### AS7

Automatic control panel WITHOUT Transfer Switch and WITHOUT mains control with M7X unit.  
Digital control unit M7X



### AS5

Automatic panel WITHOUT transfer switch and WITHOUT mains control with CEM8 unit. (\*) AS5 as optional with CEAB unit. Automatic panel without transfer switch and WITH mains control.

\*Non-contractual image. The product may vary depending on the configuration.

### CEM8 Controller

Advanced control unit for generator sets that combines an intuitive user experience with advanced generator management, incorporating connectivity and intelligent functions that optimise operation and maintenance:

- Intuitive interface and optimised navigation, with configurable dashboard.
- Connectivity and IoT for remote monitoring and intelligent management (depending on version).
- Maximum flexibility: compact or distributed mounting and configurable I/O. Compatible with Stage V and Tier 4 Final engines.
- Safety and reliability: safe engine shutdown and protection against overload and overtemperature.
- Industrial integration: buses (CAN, Ethernet, USB, RS485) and protocols (J1939, Modbus, SNMP).

### Data Sheet CEM8



### Data Sheet CEAB

